

Switch Mode Power Supply Industrial 1U Rackmount - Active PFC -




www.seasonic.com

SS-400H1U Active PFC



Dimension: L235.0 X W100.0 X H40.0 mm

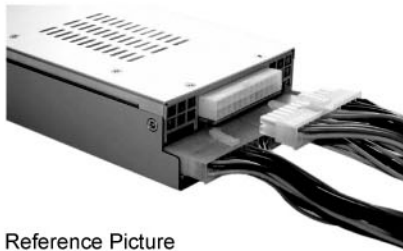

Reference Picture



Features

- Specification compliance: Intel EPS1U v2.1 and ATX12V v2.2
- Forward converter circuit
- Super high efficiency and reliability for industrial level
- Easy swap connector design
- High reliability ball bearing fan
- Low ripple & noise
- Smart & Silent Fan Control (S2FC)
- Zero minimum load on 3.3V rail
- Short circuit protection on all outputs
- Over voltage protection
- Over power protection
- 100% hi-pot test
- 100% burn in, high temperature cycled on/off
- PFC harmonics compliance: IEC1000-3-2 / EN61000-3-2 standards


Electrical Specifications

Input frequency	50 / 60 Hz
In-rush current, cold start	100A max.
Hold up time, full load	12 mS typical
Efficiency, 220-240VAC, full load	83% typical
Efficiency, 100-120VAC and full range	80% typical
Dielectric withstand, input to frame/ ground	1800VAC, 1sec.
Dielectric withstand, input to output	1800VAC, 1sec.
Line regulation	+ / - 1%, typical
Load regulation	+ / - 5%, typical
Cross regulation	+ / - 5%, typical
Ripple/ noise	1%
MTBF, full load @25C°amb.	>100K hrs, will vary w/fan type
Active PFC, full load	0.99, typical

Output Specifications

Model	DC output							Total power	Input type	Fan type
	+3.3V	+5V	+12V1	+12V2	-12V	+5Vsb				
SS-400H1U Active PFC	20A	21A	16A	17A	0.8A	3A	400W	Full range	38x38mm	
	130W		348W		9.6W	15W				

specification may change without prior notice

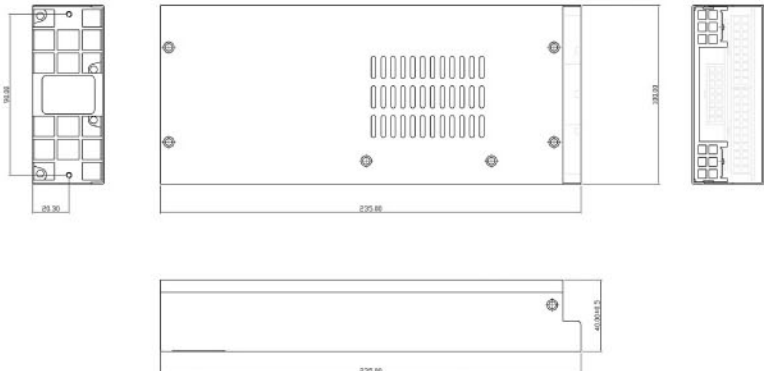

Sea Sonic Electronics Co., Ltd.

Head Office:

8th Fl., #19 Alley 360, Sec. 1, Neihu Road, Neihu, Taipei, Taiwan, R.O.C.

Tel: +886 2 2659 0338

Fax: +886 2 2659 0530

sales@seasonic.com.tw

www.seasonic.com

Factories:

I. Tao Yuan, Taiwan.

II. Dong Guan, China.

USA office:

tel: +1 626 969 9966

fax: +1 626 969 9986

usa@seasonic.com

Safety compliance: CUL, TUV, CB, CCC, BSMI

EMI / RFI compliance: CE, FCC, C-tick



REGISTERED FIRM REGISTERED FIRM